

RESTING SPACES

For the installation of the interior of cattle stalls Fattori srl has developed and brought to the market various types of cubicles produced in relation to the different needs of the client and respecting the welfare of the animal.

These elements are produced complete with an iron plate with anchor bolts on which it is extremely easy to install a stable cross bar.

The composition of the mixture has been studied in order to provide a product as close as possible to the expectations of the customer and with a suitable surface to meet the needs of the animal.

This type of cubicle envisages the arrangement of elements with a width of 125 cm with central plate next to which the origin and destination elements are placed to complete the row.









TECHNICAL SPECIFICATIONS

PLAN

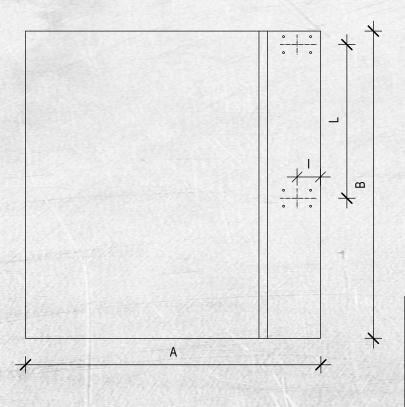

SECTION

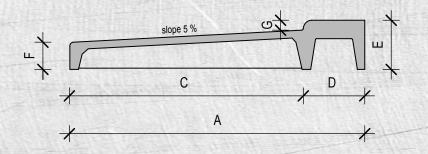

TECHNICAL CHARACTERISTICS OF THE ELEMENT

CONCRETE:

R'ck formwork ≥ 20 N/mmq R'ck in 28 day≥ 40 N/mmq

STEEL B450C checked:

fyk ≥ 450 N/mmq

ftk ≥ 540 N/mmq

WELDMESH:

Steel B450A

EXPOSURE CLASS XC3

bar cover 2,5cm

bar free interpace \geqslant 2 cm \geqslant Ø max

REI 3

FISSAGGI:

Bushings with thread M 16 embedded in the jet 130x220 mm wheelbase for fixing battifianchi and / or roof structure.

TOLLERANCES

length $\pm 1,0$ cm height $\pm 0,5$ cm width $\pm 1,0$ cm mild reinforcement $\pm 1,0$ cm

ITEM CODE	A cm	B cm	C cm	D cm	E cm	F cm	G cm	H cm	l cm	Weight Kg/cad
CU2402502240	240	250	190	50	40	22	8	19	125	1630
CU2401472240	240	147	190	50	40	22	8	19	125	988
CU2401362240	240	136	190	50	40	22	8	19	125	914
CU2401252240	240	125	190	50	40	22	8	19	125	840
CU2401142240	240	114	190	50	40	22	8	19	125	766
CU2402502745	240	250	190	50	45	27	8	19	125	1690
CU2401472745	240	147	190	50	45	27	8	19	125	994
CU2401362745	240	136	190	50	45	27	8	19	125	919
CU2401252745	240	125	190	50	45	27	8	19	125	845
CU2401142745	250	114	190	50	45	27	8	19	125	771

The table shows the standard sizes; we can also produce non-standard sizes upon prior arrangements with our offices.