

PREFABRICATED FLOORING FOR STALLS


For the purpose of offering an ever more complete service to its customers Fattori srl has designed prefabricated full floors for the installation of rope or rod scrapers that go to join the numerous types of slatted flooring it has been supplying the market with for years and put them into production. The prefabricated solution offers the advantage of guaranteeing a perfect coplanarity of the surfaces, "scoring" with an ideal depth that makes it possible to keep the walk over surfaces drier, a good grip for the animals and a considerable speed of implementation times.

The use of prefabricated elements also makes it possible to avoid the operations of protecting the concrete on the site while it hardens.

A right and a left module are made which once placed side by side they create a continuous floor already with a central groove that then acts as a guide for the scrapper.

The slope of the pavement remains at the discretion of the customer: if required it will be sufficient to provide for a variation of height between the support bands to be made before the installation.










TECHNICAL PRODUCT DATA SHEET

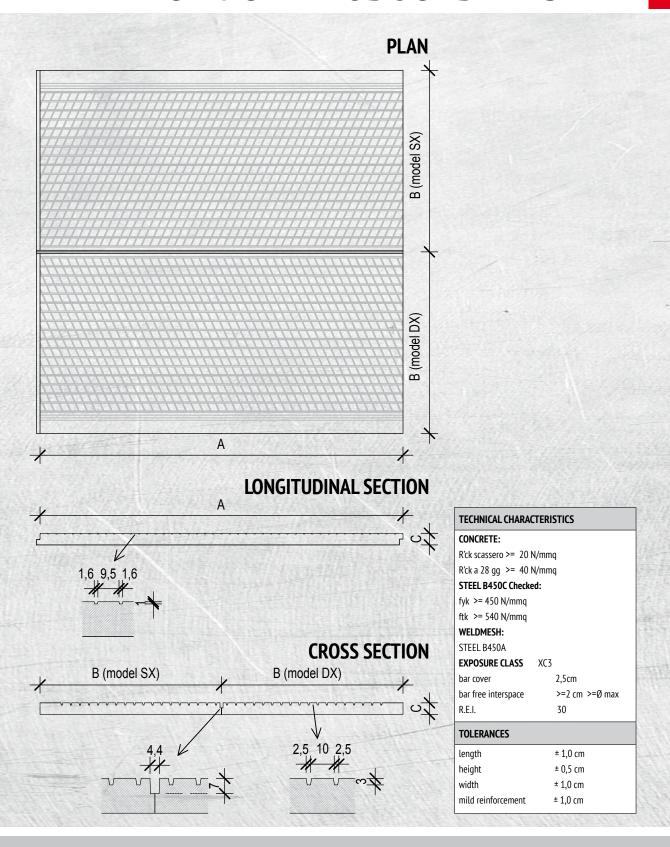

ARTICLE CODE	A	В	H.	Flow	Weight kg/cad
PAV500125	500	125	16	4/8/12 ton	2250
PAV500150	500	150	16	4/8/12 ton	2700
PAV500175	500	175	16	4/8/12 ton	3150
PAV500200	500	200	16	4/8/12 ton	3600
PAV500225	500	225	16	4/8/12 ton	4050
PAV500250	500	250	16	4/8/12 ton	4500

The table shows the standard sizes; we can also produce non-standard sizes upon prior arrangements with our offices