

RESTING SPACES

For the installation of the interior of cattle stalls Fattori srl has developed and brought to the market various types of cubicles produced in relation to the different needs of the client and respecting the welfare of the animal.

These elements are produced complete with an iron plate with anchor bolts on which it is extremely easy to install a stable cross bar.

The composition of the mixture has been studied in order to provide a product as close as possible to the expectations of the customer and with a suitable surface to meet the needs of the animal.

This type of cubicle envisages the arrangement of elements with a width of 125 cm with central plate next to which the origin and destination elements are placed to complete the row.









TECHNICAL SPECIFICATIONS


STANDARD ELEMENT PLAN VIEW

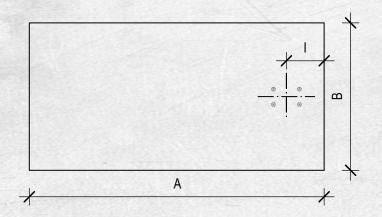

HEAD ELEMENT PLAN VIEW

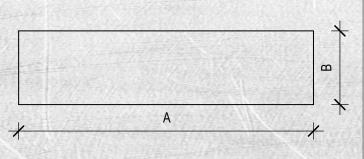

SECTION

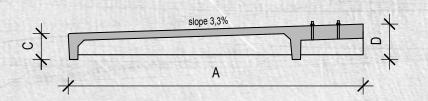

TECHNICAL CHARACTERISTICS OF THE ELEMENT

CONCRETE:

R'ck formwork ≥ 20 N/mmq R'ck in 28 day≥ 40 N/mmq

STEEL B450C checked:

fyk ≥ 450 N/mmq ftk ≥ 540 N/mmq

WELDMESH:

Steel B450A

EXPOSURE CLASS XC3 2,5cm bar cover

ber free interspace ≥ 2 cm ≥ Ø max REI

30

FISSAGGI:

Galvanized iron plate complete with bushings with M 12 threading embedded in the casting with spacing of 130x220 mm.

TOLLERANCES

± 1,0 cm length ± 0,5 cm height ± 1,0 cm width mild reinforcement ± 1,0 cm

ITEM CODE	A cm	B cm	C cm	D cm	Weight Kg/cad
CU2401252230	240	125	22	30	680
CU2406252230	240	62,52	23	0	410
CU2501252230	250	125	22	30	720
CU2506252230	250	62,52	23	0	450